

TA26.2P



caratteristiche/features



peso/weight



22,5 kg

rotazione/rotation




input



output

prestazioni/performance




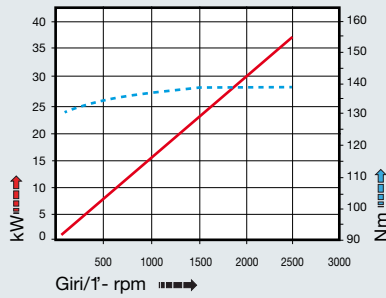


CONO SHANK	size	A	B	H	
				standard	optional
DING9871 *	-	192	35	-	-
	45			110	-
ANSIB5.50 *	-	192	35	-	-
	50			110	-
BT *	-	200	45	110	-
	50			110	-
HSK	-	201	46	110	-
	80			110	-
DING9893	-	196	-	110	-
	100			110	-
CAPTO	-	196	-	110	-
	100			110	-
KM	-	192	-	110	-
	100			110	-
DIN2080	-	165	16	110	-
	50			110	-
NMTB	-	165	16	110	-
	50			110	-
ANSIB5.18	-	165	16	110	-
	50			110	-

tipi mandrino disponibili / available spindle types

- 2** Albero portafresa Milling shaft
- 3** Weldon Whistle-Notch

Ø16-Ø27-Ø32 Ø32 ABS50

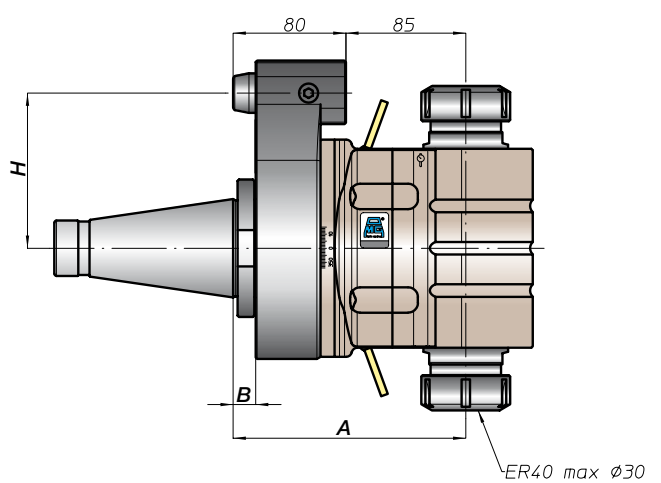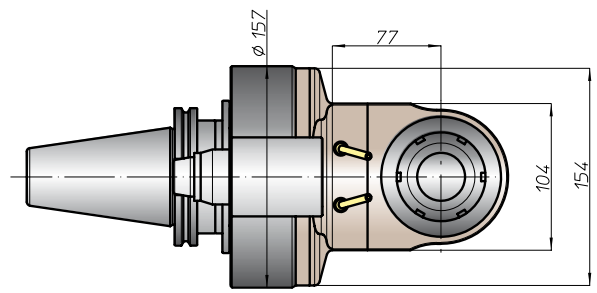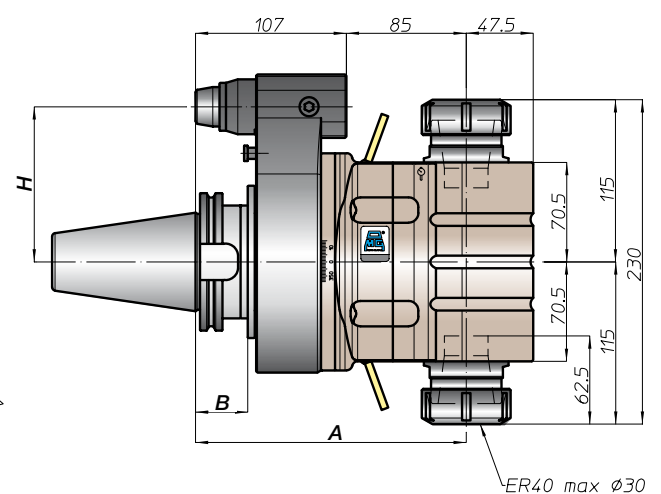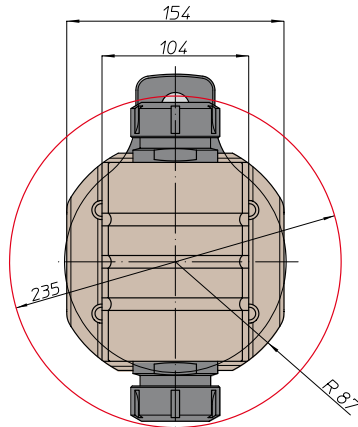

* Option: Dual Contact



FH
BAH
TA.CP
TA
MO
HT
VH
TSI/TSX
T
MT-TC-TC3
Accessori
Accessories
Appendice tecnica
Technical supplement