


TAO10.PD



caratteristiche/features




peso/weight



rotazione/rotation





prestazioni/performance

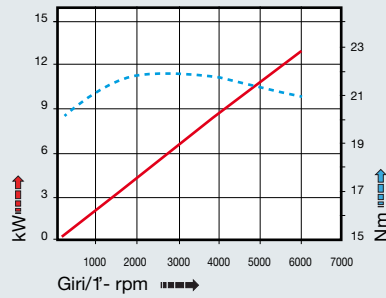


CONO SHANK	size	A	B	H	
				standard	optional
* DIN69871	-	184,5	35	65	-
	40			80	110
	45			80	110
* ANSIB5.50 CAT	40	184,5	35	65	-
	50			80	110
* BT	40	192,5	45	65	-
	50			80	110
HSK DIN69893	63	193,5	44	65	-
	80			80	110
	100			80	110
CAPTO ISO26623	C5	188,5	39	65	-
	C6			80	110
	C8			80	110
KM	63	184,5	35	65	-
	80			80	110
	100			80	110
DIN2080	-	184,5	35	-	-
	-			-	-
	-			-	-
NMTB ANSIB5.18	-	184,5	35	-	-
	-			-	-

tipi mandrino disponibili / available spindle types

- 2** Albero portafresa / Milling shaft **Ø16**
- 4** DIN69893-HSK **HSK25**

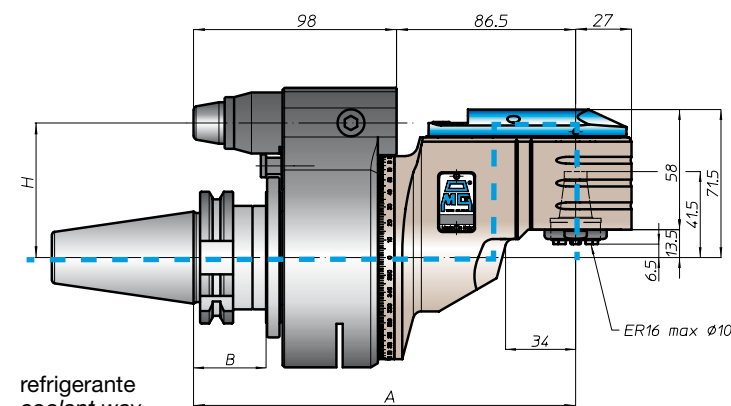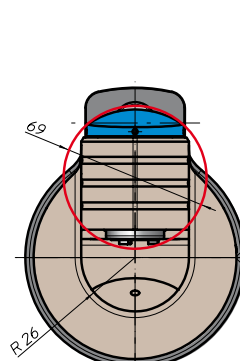

refrigerante coolant way

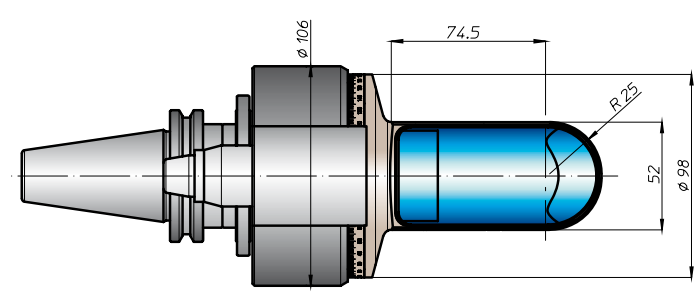

* Option: Dual Contact



FH
BAH
TA.CP
TA
MO
HT
VH
TSI/TSX
T
MT-TC-TC3
Accessori
Accessories
Appendice tecnica
Technical supplement