

# TAO26.PD



caratteristiche/features

$\varnothing$  26    M20    1590 N  
 1-1    3000    70 bar


peso/weight



rotazione/rotation

input    output


prestazioni/performance

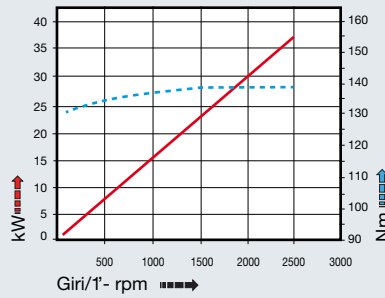

CONO SHANK	size	A	B	H	
				standard	optional
* DIN69871	-	270	35	-	-
	50			110	-
* ANSIB5.50	-	274	46	-	-
	50			110	-
* BT	-	270	35	-	-
	50			110	-
* DIN69893	-	279	46	-	-
	100			110	-
* ISO26623	-	274	46	-	-
	C8			110	-
* KM	-	270	35	-	-
	100			110	-
* DIN2080	-	274	46	-	-
	-			110	-
* ANSIB5.18	-	274	46	-	-
	-			110	-

tipi mandrino disponibili / available spindle types

- 2** Albero portafresa Milling shaft    **3** Weldon Whistle-Notch    **4** DIN69893-HSK
- Ø22-Ø27-Ø32**    **Ø16-Ø20**    **HSK63**

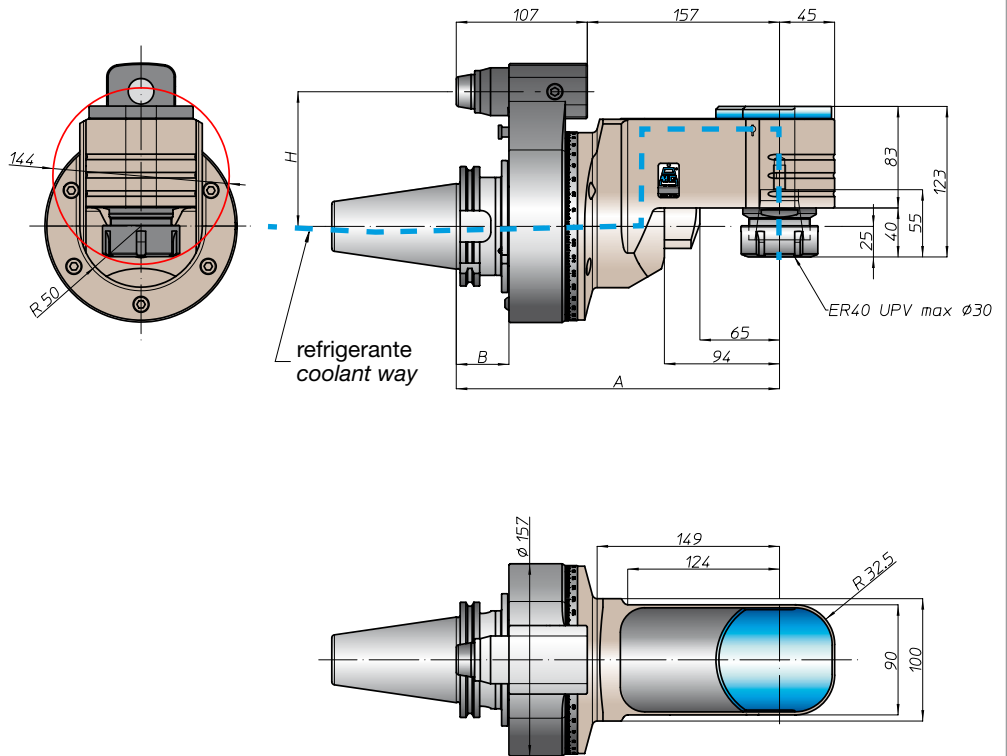

\* Option: Dual Contact

FH  
 BAH  
 TA.CP  
 TA  
 MO  
 HT  
 VH  
 TSI/TSX  
 T  
 MT-TC-TC3  
 Accessori  
 Accessories  
 Appendice tecnica  
 Technical supplement

