


TAR03.PL


caratteristiche/features




peso/weight




rotazione/rotation



prestazioni/performance

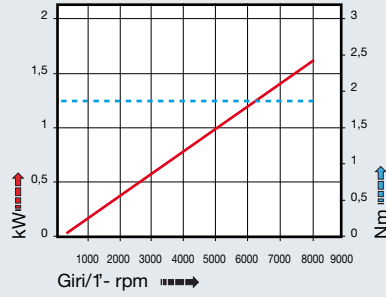

CONO SHANK	size	A	B	H	
				standard	optional
DING69871 *	30	247,5	35	65	-
	40			80	110
	45			80	110
	50			80	110
ANSIB5.50 *	40	255,5	45	65	-
	50			80	110
BT *	40	255,5	45	65	-
	50			80	110
DING69893	63	256,5	44	65	-
	80			80	110
	100			80	110
ISO26623	C5	251,5	39	65	-
	C6			80	110
	C8			80	110
KM	63	247,5	39	65	-
	80			80	110
	100			80	110
DIN2080	-	217,5	13	65	-
	40			80	110
	50			80	110
ANSIB5.18	40	220,5	16	65	-
	50			80	110

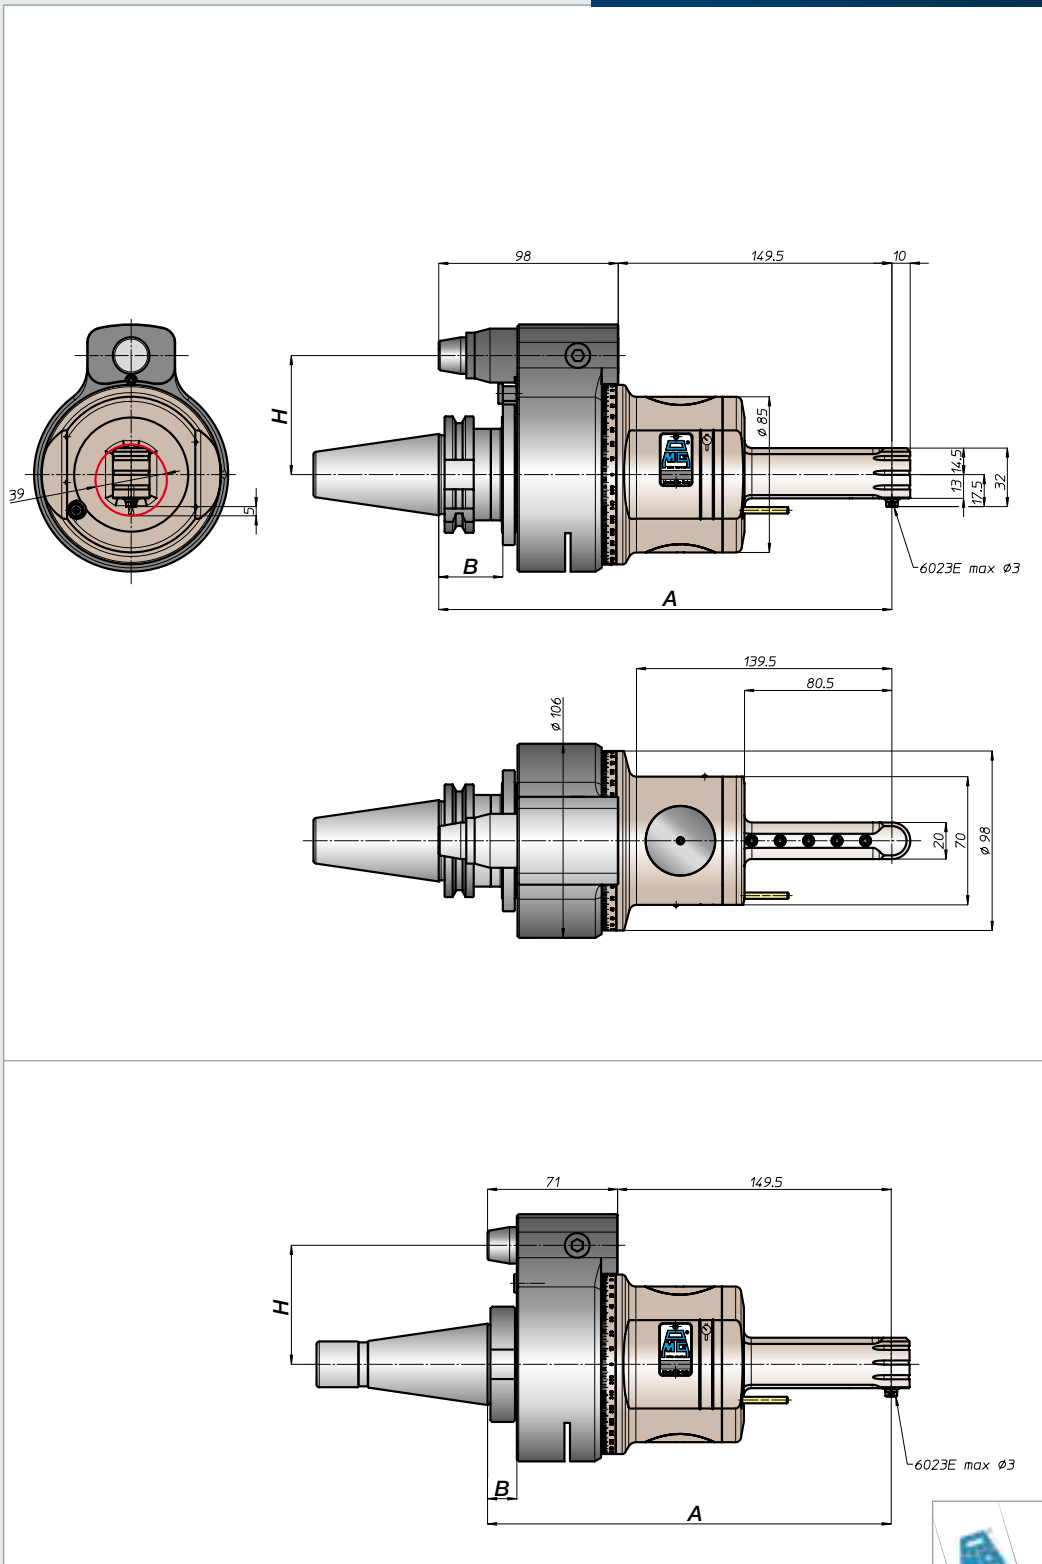

* Option: Dual Contact

FH
BAH
TA.CP
TA
MO
HT
VH
TSI/TSX
T
MT-TC-TC3
Accessori
Accessories
Appendice tecnica
Technical supplement
4-9

