




TAV13.PD



caratteristiche/features




peso/weight



rotazione/rotation




prestazioni/performance

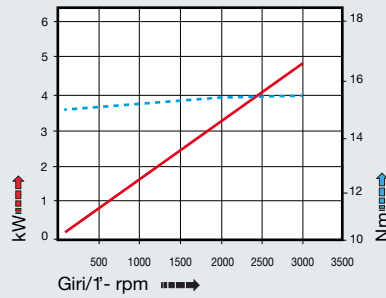

CONO SHANK	size	A	B	H	
				standard	optional
* DIN69871 *	-			65	-
	40			80	110
	45	150	35	80	110
* CAT	40			65	-
	50			80	110
* BT	40			65	-
	50	158	45	80	110
HSK	63		42	65	-
	80	159		80	110
	100		46	80	110
CAPTO	C5			65	-
	C6	154	39	80	110
	C8			80	110
KM	63			65	-
	80	150		80	110
	100			80	110
DIN2080	-	120	13	65	-
	40			-	-
	-			-	-
NMTB	-	-	-	-	-
	-	-	-	-	-

tipi mandrino disponibili / available spindle types

- 1** DIN6388-ER **ER25**
- 3** Weldon Whistle-Notch **Ø16**

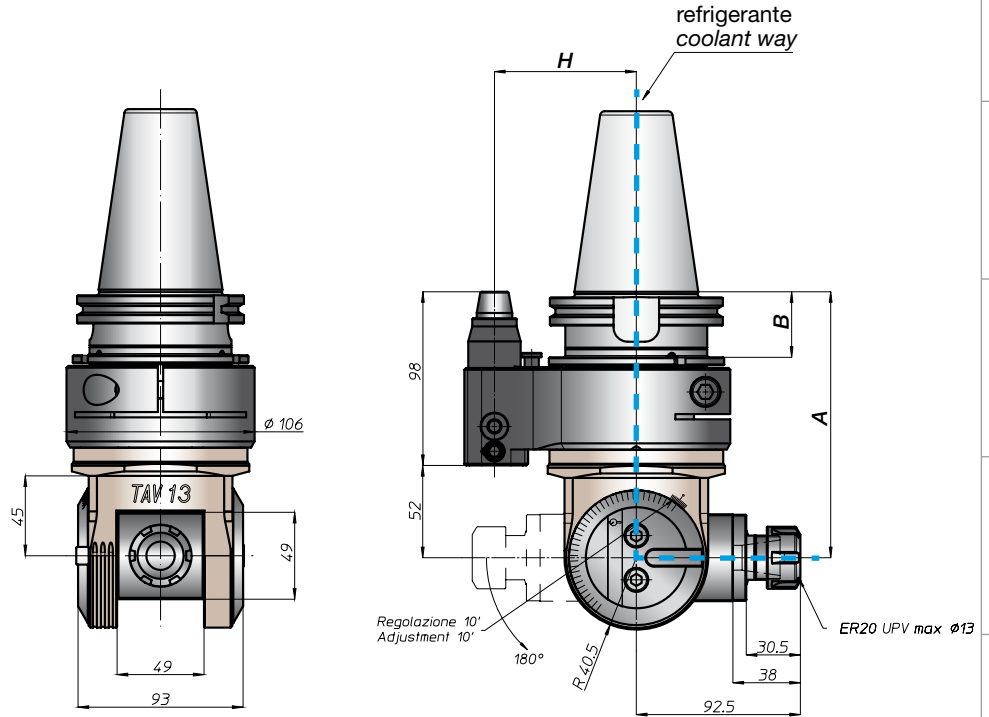

* Option: Dual Contact

FH
BAH
TA.CP
TA
MO
HT
VH
TSI/TSX
T
MT-TC-TC3
Accessori
Accessories
Appendice tecnica
Technical supplement

