



# TAV20.PD



caratteristiche/features

$\phi$  20   
 M16   
 1740 N  
 1-1   
 4000   
 70 bar


peso/weight

22 kg

rotazione/rotation

input   
 output


prestazioni/performance

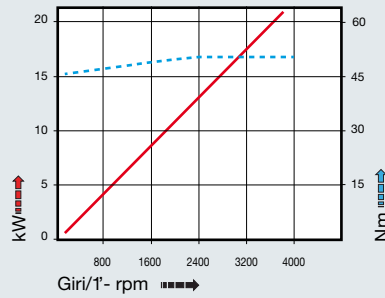

CONO SHANK	size	A	B	H	
				standard	optional
* DING69871 *	-	173	35	-	-
	50			110	-
* CAT ANSIB5.50 *	-	173	35	-	-
	50			110	-
* BT	-	181	45	-	-
	50			110	-
HSK DING69893	-	182	46	-	-
	80			110	-
CAPTO ISO26623	-	177	-	-	-
	100			110	-
KM	-	173	-	-	-
	100			110	-
DIN2080	-	-	-	-	-
	-			-	-
NMTB ANSIB5.18	-	-	-	-	-
	-			-	-

tipi mandrino disponibili / available spindle types

**1** DIN6388-ER **ER40**   
 **3** Weldon Whistle-Notch **Ø20-Ø25**   
 **4** DIN69893-HSK **HSK50**   
 **6** ABS Licenza KOMET® **ABS50**

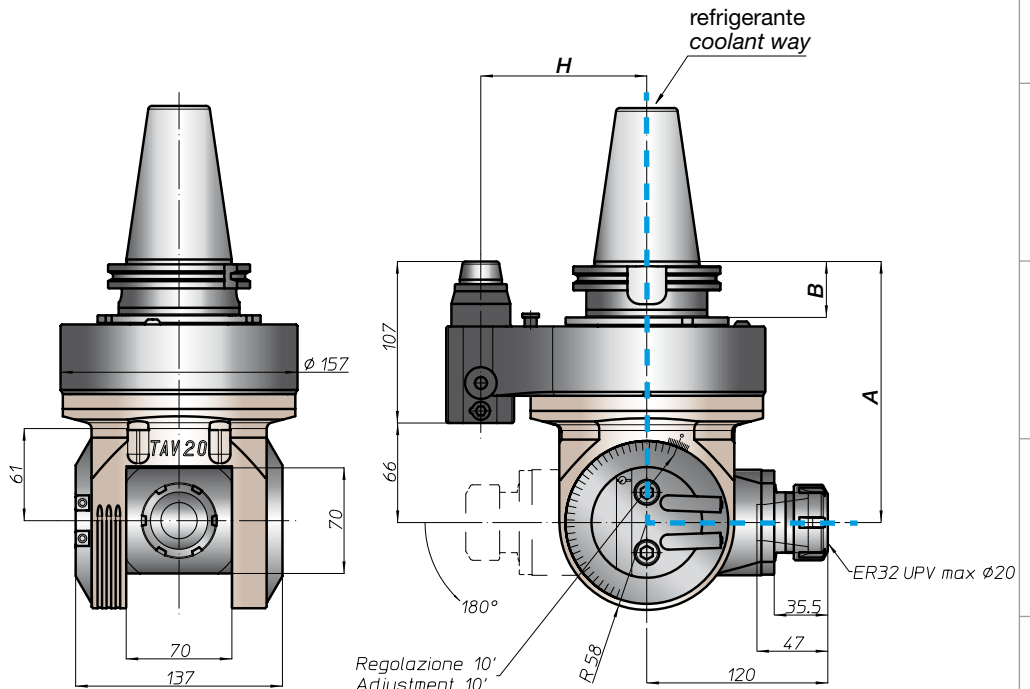

\* Option: Dual Contact

FH  
 BAH  
 TA.CP  
 TA  
 MO  
 HT  
 VH  
 TSI/TSX  
 T  
 MT-TC-TC3  
 Accessori  
 Accessories  
 Appendice tecnica  
 Technical supplement

