


# TAV30.P



caratteristiche/features

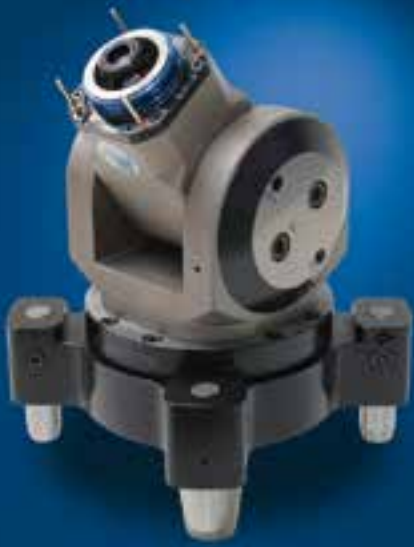

  
 ø 30    M24    2740 N  

  
 1-1    2500

peso/weight



42 kg

rotazione/rotation




input





output

prestazioni/performance

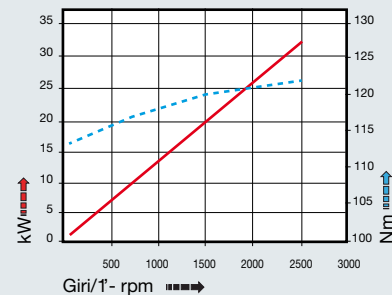

tipi mandrino disponibili / available spindle types

- |                                    |   |                                       |  |
|------------------------------------|---|---------------------------------------|--|
| <b>1</b> DIN6388-ER<br><b>ER50</b> | <b>2</b> Albero portafresa<br>Milling shaft<br><b>Ø32-Ø40</b> | <b>4</b> DIN69893-HSK<br><b>HSK63</b> | <b>6</b> ABS<br>Licenza KOMET®<br><b>ABS63</b> |
|------------------------------------|---|---------------------------------------|--|

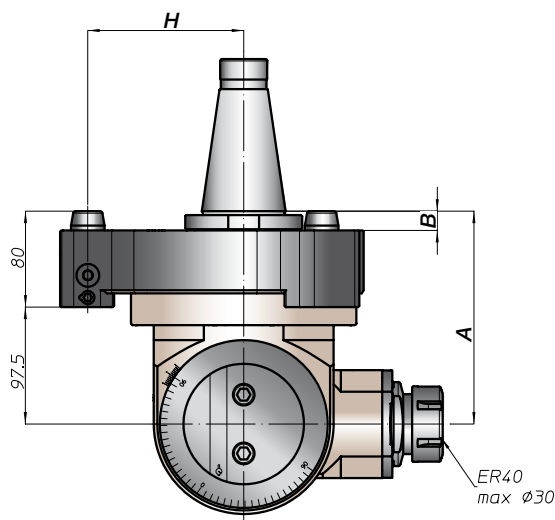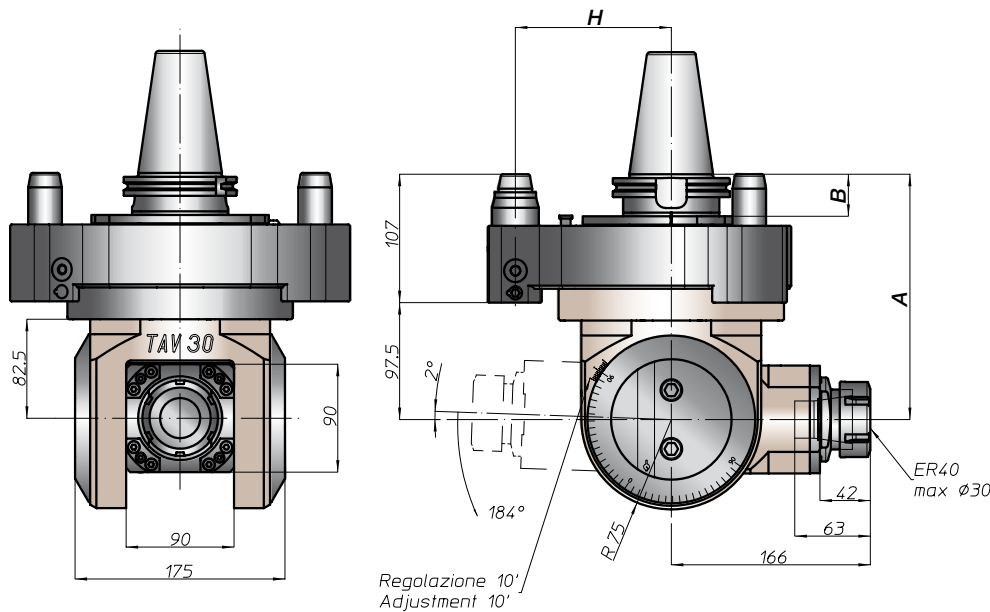

CONO SHANK	size	H			
		A	B	standard	optional
DIN69871 *	-	-	-	-	-
ANSIB5.50 *	50	204,5	35	130	-
BT *	50	212,5	45	130	-
HSK	-	-	42	-	-
DIN69893	-	213,5	46	130	-
CAPTO	-	-	-	-	-
ISO26623	-	208,5	-	130	-
KM	-	204,5	-	130	-
DIN2080	-	-	-	-	-
NMTB	-	177,5	16	130	-
ANSIB5.18	50	177,5	16	130	-

\* Option: Dual Contact

