




UC GOLD CHUCK (UC16) High Vibration Damping Type


UC 黃金夾頭刀柄 (UC16) 高阻尼減震型

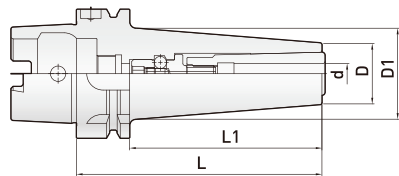

Dual face contact
兩面接觸




Surface roughness
表面粗度



Run out accuracy
內孔偏擺度



Surface hardness
表面硬度



Carbonized depth
滲碳深度



Order Code 訂購編號	Range(d) 夾持範圍	L	L1	D	D1	Min ¹ G2.5 動態平衡	Spanner 扳手規格	Recommended Torsion 推薦鎖固扭力	Torque Wrench 扭力扳手	Center Coolant 中心出水	Side Coolant 側面出水	Pin Collet Pin 筒夾
HSK63A-UC16-120	6~16	120	94	32	47	30,000	M6	15Nm	TW30+M06100	✓	✓	X
HSK100A-UC16-150	6~16	150	121	32	49	20,000	M6	15Nm	TW30+M06160	✓	✓	X

- Provide the center coolant and the side coolant.
- Select the side coolant must use the collet with coolant slot, please check p.20
- Select the general collet for center coolant, please check p.19
- Coolant can be sprayed directly into the edge of tool for quick cooling and remove the steel chip.

- 可以選擇中心出水及側面出水的功能。
- 側面出水必須選用有水槽的夾頭，請參閱 p.20
- 中心出水選用一般的夾頭，請參閱 p.19
- 冷卻液可直接噴到刀尖位置，可快速冷卻及去除鐵屑。

