



# UC GOLD CHUCK ( UC20 ) High Vibration Damping Type


UC 黃金夾頭刀柄 (UC20) 高阻尼減震型



Dual face contact  
兩面接觸

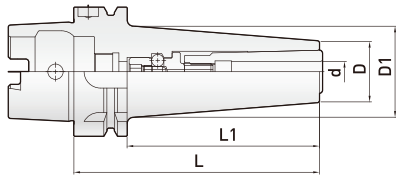


Surface roughness  
表面粗度



Run out accuracy  
內孔偏擺度



Surface hardness  
表面硬度



Carbonized depth  
滲碳深度

Order Code 訂購編號	Range(d) 夾持範圍	L	L1	D	D1	Min <sup>-1</sup> G2.5 動態平衡	Spanner 扳手規格	Recommended Torsion 推薦鎖固扭力	Torque Wrench 扭力扳手	Center Coolant 中心出水	Side Coolant 側面出水	Pin Collet Pin筒夾
HSK63A-UC20-130	6~20	130	104	45	53	30,000	M8	20Nm	TW30+M08100	✓	✓	✓
HSK100A-UC20-150	6~20	150	121	45	54	20,000	M8	20Nm	TW30+M08160	✓	✓	✓

- Provide the center coolant and the side coolant.
- Select the side coolant must use the collet with coolant slot, please check p.20
- Select the general collet for center coolant, please check p.19
- Select the PIN Collet, please check p.21
- Coolant can be sprayed directly into the edge of tool for quick cooling and remove the steel chip.

- 可以選擇中心出水及側面出水的功能。
- 側面出水必須選用有水槽的夾頭，請參閱 p.20
- 中心出水選用一般的夾頭，請參閱 p.19
- 可以選用PIN Collet，請參閱 p.21
- 冷却液可直接噴到刀尖位置，可快速冷却及去除鐵屑。



UC  
20

HSK  
A  
63  
/  
100