



# UC GOLD CHUCK ( Slim Long Type )


UC 黃金夾頭刀柄 (小徑加長型)



Dual face contact  
兩面接觸

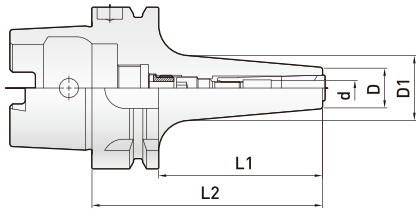


Surface roughness  
表面粗度



Run out accuracy  
內孔偏擺度



Surface hardness  
表面硬度



Carbonized depth  
滲碳深度

Order Code 訂購編號	Range(d) 夾持範圍	L	L1	D	D1	Min <sup>1</sup> G2.5 動態平衡	Spanner 扳手規格	Recommended Torsion 推薦鎖固扭力	Fixed Torque Spanner 固定扭力扳手
HSK63A-UC6-90	3~6	90	64	16	26	30,000	M4	5Nm	30294-5146
UC6-120	3~6	120	94	16	32	30,000	M4	5Nm	30294-5146
UC6-150	3~6	150	124	16	37	30,000	M4	5Nm	30294-5146
HSK63A-UC10-100	3~10	100	74	24	34	30,000	M5	7Nm	30294-5154
UC10-120	3~10	120	94	24	40	30,000	M5	7Nm	30294-5156
UC10-150	3~10	150	124	24	46	30,000	M5	7Nm	30294-5156

- Collet chuck designed without nut and with inner-holding collet. This has strong rigidity and high stability.
- Torque wrench is recommended for chuck stability.
- Torque wrench must be ordered separately.
- The recommended torsion and correct torque wrench prevents deformation of the tool holder.

- 沒有螺帽的後拉式夾頭設計，鋼性強穩定性高。
- 為求使用上的穩定性，建議使用扭力扳手。
- 扭力扳手必須另外訂購。
- 鎖固扭力不要超過推薦值的30%以上，過高的鎖固扭力，可能導致刀柄的變形。



UC

HSK

A63