



## SD PLUS CHUCK (AM TYPE)

SD 高精度夾頭刀柄 (AM型)

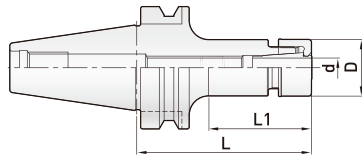


F Type Collet / F型筒夾



Taper tolerance  
錐度公差




Surface roughness  
表面粗度



Run out accuracy  
內孔偏擺度



Surface hardness  
表面硬度



Carbonized depth  
滲碳深度

Order Code 訂購編號	Range(d) 夾持範圍	L	L1	D	Min <sup>-1</sup> G2.5 動態平衡	Nut 螺帽	Spanner 扳手
BT30-SD6-90AM	2-6	90	50	20	30,000	CN-SD6AM	30194-820
SD10-90AM	2-10	90	68	30	30,000	CN-SD10AM	30194-830
SD13-75AM	3-13	75	50	35	30,000	CN-SD13AM	30194-835
SD16-90AM	4-16	90	68	42	30,000	CN-SD16AM	30194-842
BT40-SD6-90AM	2-6	90	50	20	30,000	CN-SD6AM	30194-820
SD10-90AM	2-10	90	63	30	30,000	CN-SD10AM	30194-830
SD13-90AM	3-13	90	55	35	30,000	CN-SD13AM	30194-835
SD16-90AM	4-16	90	63	42	30,000	CN-SD16AM	30194-842

- Clamping nut design by circular cylinder. Bearing spanner must be used.
- Three types of collet to choose from (1) D type for gripping all type of tools.  
(2) E type for End mill. (3) F type for coolant supply.
- Bearing spanner and stop screw must be ordered separately.
- 全圓螺帽，必須使用軸承扳手。
- 筒夾有三種類別可選擇 (1) D型：可夾持任何刀具 (2) E型：銑刀專用 (3) F型：中心出水刀具使用。
- 軸承扳手及止動螺絲必須另外訂購。

