


## Reduction Receivers

Reduction Receivers function as adapters to allow tooling utilizing the smaller 52mm pattern to be mounted on 96mm pattern receivers.


- Material: Alloy Steel
- Heat Treat: Case Hardened, Rc 58-62
- Thickness Tolerance: ±.01mm
- Pull Studs Included

### 96-52mm Reduction Receivers

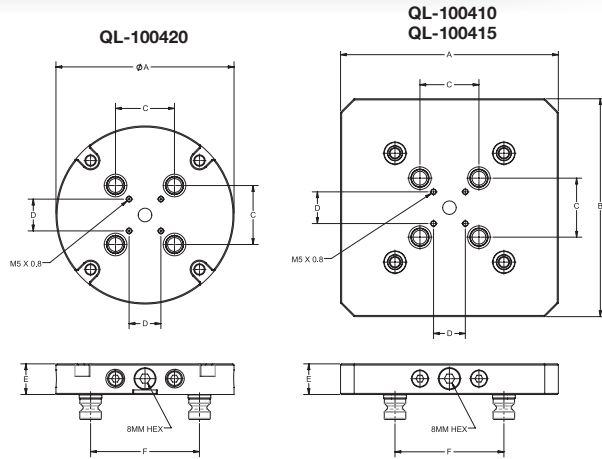

Part Number	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	Weight lbs (kg)	Max. Torque ft*lbs (Nm)	Pull Stud
QL-100410	192	192	52	28	27	96	15.71 (7.13)	22 (30)	QL-200800 / QL-200805
QL-100415	150	126	52	28	27	96	7.72 (3.50)	22 (30)	QL-200800 / QL-200805
QL-100420	157	-	52	28	27	96	7.90 (3.58)	22 (30)	QL-200800 / QL-200805

### 96-52mm Multi-Loc Reduction Receivers

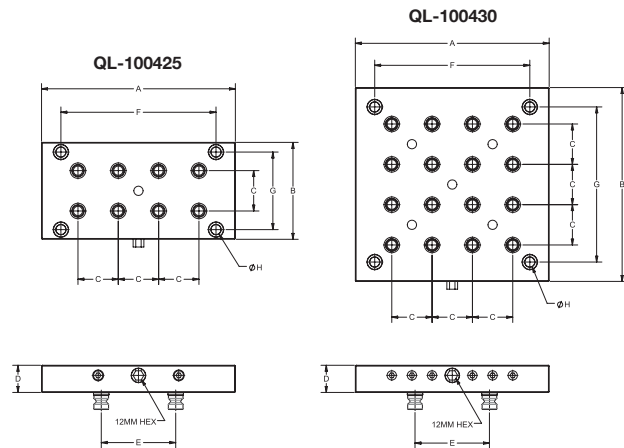

Part Number	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	Weight lbs (kg)	Max. Torque ft*lbs (Nm)	Pull Stud
QL-100425	250	125	52	35	96	200	100	12.7	16.27 (7.38)	22 (30)	QL-200800 / QL-200805
QL-100430	250	250	52	35	96	200	200	12.7	32.65 (14.81)	22 (30)	QL-200800 / QL-200805

QUICK CHANGE FIXTURING » QUICK-LOC™